



“LWH-LED10-TW” LED ILLUMINATOR 10W WHITE LIGHT WITH TWINKLE EFFECT

A very efficient 10W light source, designed for use with optical fibers, based on LED technology. Extremely high power makes this light source suitable for scenographic lighting tasks with sparkle effect for the realization of starry skies.


The LWH-LED10-TW illuminator is equipped with a suitable power supply to be connected directly to the 100-240V mains power supply.

Illuminator with control via DIP Switch and RF remote control.

With a diam.30mm input connector, this light source is ideal for new projects, for retro-fitting or for existing fibre optic installations.

Technical Characteristics	Description
LED Power	10W
Led	Warm white 3000°K, natural 4000°K, cold 6000°K
Power supply	100-240 VAC 50/60Hz
LED life (hours)	50,000 hours
Minimum working room temperature	-10°C
Maximum working ambient temperature	+45°C
Light control and twinkle effect	DIP Switch or rf remote control
Illuminator body	Grey painted aluminum

Dimensions

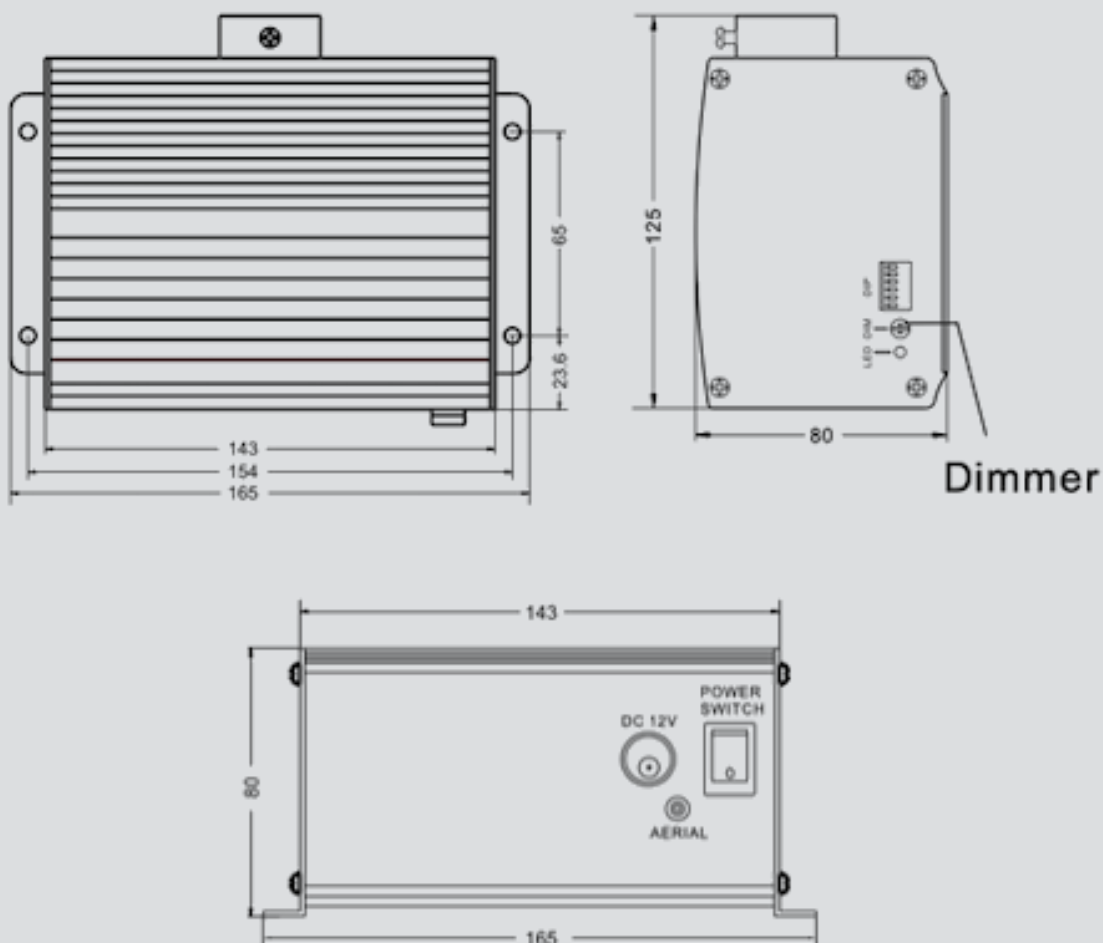

Control via DIP Switch

PRO. NO.	DIP SWITCH (1=ON / 0=OFF)						FUNCTIONS
	6	5	4	3	2	1	
00	0	0	0	0	0	0	Motor stopped , Led working
01	1	0	0	0	0	1	Wheel Speed : 6 RPM
02	1	0	0	0	1	0	Wheel Speed : 4 RPM
03	1	0	0	0	1	1	Wheel Speed : 3 RPM
04	1	0	0	1	0	0	Wheel Speed : 2 RPM
05	1	0	0	1	0	1	Wheel Speed : 1.5 RPM
06	1	0	0	1	1	0	Wheel Speed : 1 RPM
07	1	0	0	1	1	1	Wheel Speed : 0.5 RPM


Note : RPM is the wheel speed per minute

CONTROL WITH RADIO FREQUENCY REMOTE CONTROL

In control mode by radio frequency remote control, in addition to switching on and off and we can adjust the intensity of the light (n.6 intensity levels).

If you want to have different speed wheel, please use DIP switch.

The radio frequency remote control allows you to control the illuminator even from a room adjacent to the illuminator positioning point.

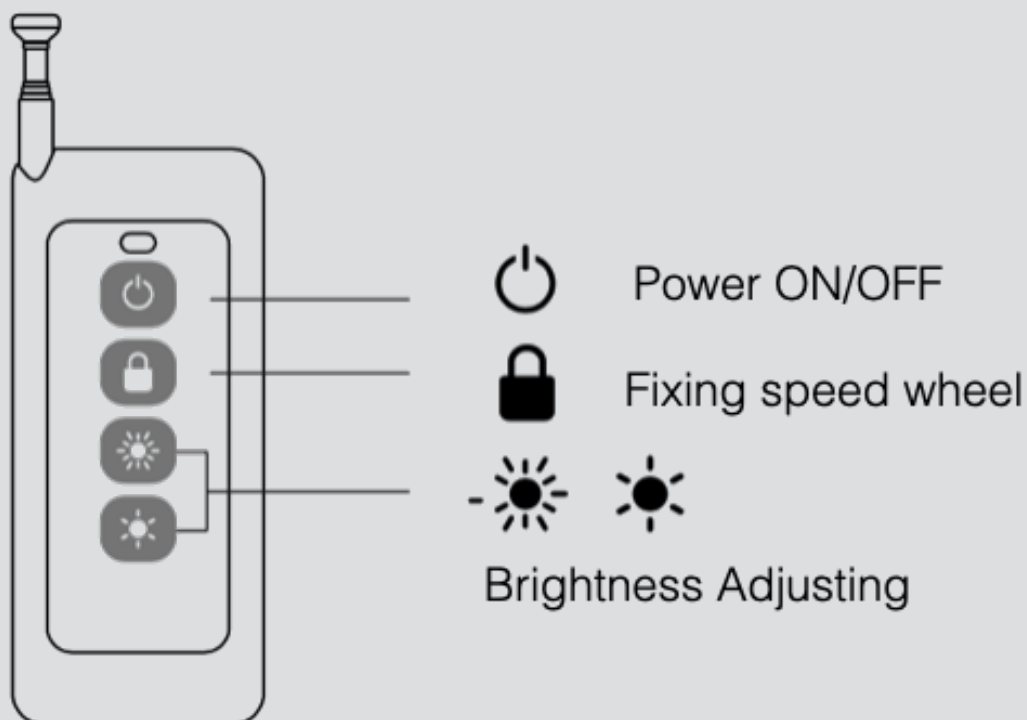

RF Remote control