

12W LED RGB+W light source

“DMX-LRGB+W/LED12”


CE

COBB
FIBRE OTTICHE



The LED light sources of the “LED LRGB+W” series are produced for use with both glass optical fibers and synthetic optical fibers. The “LRGB+W” LED light sources allow you to control the color of the emitted light and the speed of color rotation, creating scenographic effects via radio frequency remote control, RF touch panel, DALI, and DMX.

The illuminators are already prepared, thanks to the integrated electronics, for connection to an unlimited number of illuminators, while maintaining color synchronization.

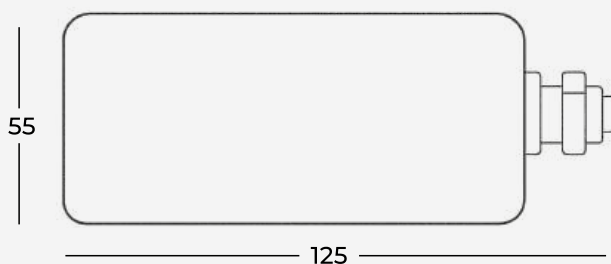

Dimensions

COBB FIBRE OTTICHE SRL

Via Nelson Mandela, 20 | 24048 Treviolo (BG) | Italy Tel. +39 035 0448601 - Fax +39 035 0448585
info@fibre-ottiche.com - www.fibre-ottiche.it

System components



DMX interface

(Controller not supplied by us)

12W RGB+W LED light source

Color control via DMX signal

Electronic card interface for the control and programming of scenographies through DMX 512 signal on four channels: red, green, blue and white

Power supply DMX interface




| Technical specifications | Description |
|--------------------------|----------------------------------|
| Led color | RGB+W (red, green, blue + white) |
| Power | 12W |
| Cooling | fanless cooling |
| Lifetime | 50.000 hours |
| Standard connector input | 30 mm |
| Protection rating (IP) | IP54 (IP65 on request) |
| Housing | delrin (POM) |
| Finish | black |
| Dimmable | yes |
| Power supply | 220-240VAC / 50-60Hz |

12W RGB+W LED light source



fibre optics bundle

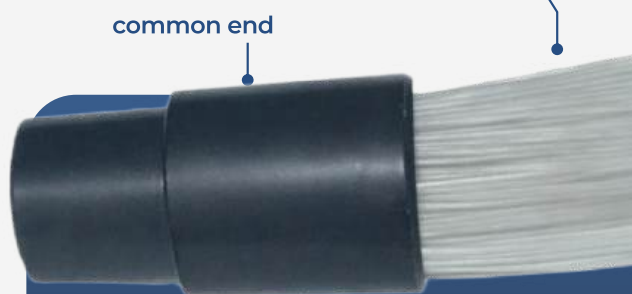

common end

insert the common end in the light source and block it through the screw set on the light source

