

**Product Features**

**Spotlight material:** plexiglass  
**Front ring:** plexiglass  
**Front glass:** frosted  
**Led:** 1 LED 0,2W  
**Power:** 0,2W  
**LED light:** white 2700°K - 3000°K - 4000°K - 5500°K  
**Supply current:** constant current 12V  
**Connection:** parallel connection  
**Degree of protection:** IP65  
**Installation:** by pressure or glue  
**Led lifetime:** 50.000 hours  
**Control mode:** on/Off, Dimmable, RF Remote Control, DMX, DALI, Smart App\*

**Finish**


PL Plexiglass

**LED color**

- 001 White 2700K      20 Blue
- 00 White 3000K      30 Green
- 01 White 4000K      40 Red
- 10 White 5500K

**Focal**

00 Diffuse light

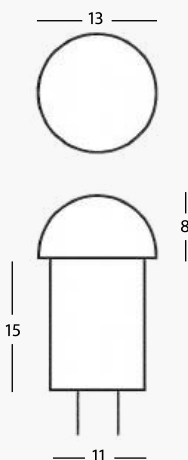

Steps signalling



False Ceiling



Shelves



Wall (internal)

\* **Smart Control & Support**

