**"DALI-LRGB/LED3" : 3W RGB LED LIGHT SOURCE AND REMOTE CONTROL**

The Led light sources of the "Led LRGB" series are produced for use with both glass optical fibers and synthetic optical fibers.

The "LRGB" illuminators allow you to control the color of the light emitted and the speed of color rotation, creating scenographic effects via radio frequency remote control.

The Led light sources are already prepared thanks to the integrated electronics, for connection to an unlimited number of illuminators while maintaining the synchrony of the colors.

TECHNICAL FEATURES

RGB led (red, green, blue)

Power 3W

Fanless cooling

LED life 50,000 hours

IP54 illuminator protection (IP65 on request)

Mains power supply 220-240VAC / 50-60Hz

**COLOR CONTROL VIA DALI SIGNAL****CONTROL FUNCTIONS VIA DALI SIGNAL**

Electronic card interface for controlling and programming scenes via DALI signal

"DALI-LRGB/LED3" SYSTEM'S COMPONENTS

3W RGB LED LIGHT SOURCE




COLOR CONTROL MODULE



DALI INTERFACE




DIMENSIONS

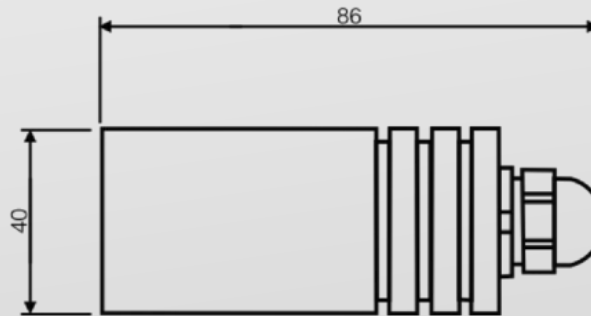

LED LIGHT SOURCE - FIBRE OPTIC BUNDLE CONNECTION



3W RGB LED LIGHT SOURCE

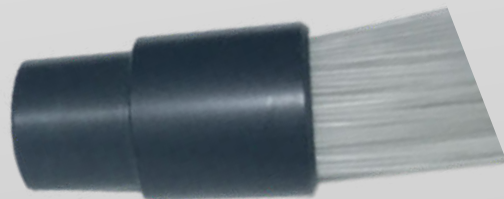

COMMON END

FIBRE OPTIC BUNDLE



INSERT THE COMMON END INTO THE LED LIGHT SOURCE AND LOCK THROUGH THE SCREW SET ON THE LIGHT SOURCE