

**“DMX-LRGB+W/LED12” COMPLETE SYSTEM : 12W RGB+W LED LIGHT SOURCE**

The led light sources of the "Led LRGB" series are produced for use with both glass optical fibers and synthetic optical fibers.

The led light sources "LRGB + W" allow you to control the color of the light emitted and the speed of color rotation, creating scenographic effects via radio frequency remote control, rf touch panel, dali and dmx. The illuminators are already prepared thanks to the integrated electronics, for connection to an unlimited number of illuminators while maintaining the synchrony of the colors.

**TECHNICAL FEATURES**

RGB+W led (red, green, blue + white)  
Power 12W  
Fanless cooling  
LED life 50,000 hours  
IP54 illuminator protection (IP65 on request)  
Mains power supply 220-240VAC / 50-60Hz

**COLOR CONTROL VIA DMX SIGNAL****SIGNAL CONTROL FUNCTIONS DMX**

Electronic card interface for the control and programming of scenographies through DMX 512 signal on four channels: red, green, blue and white.

**INDIVIDUAL COMPONENTS THAT MAKE UP THE  
“DMX-LRGB+W/LED12” LIGHTING SYSTEM**

12W RGB+W LED LIGHT SOURCE




DMX INTERFACE




POWER SUPPLY DMX INTERFACE



**DIMENSIONS**

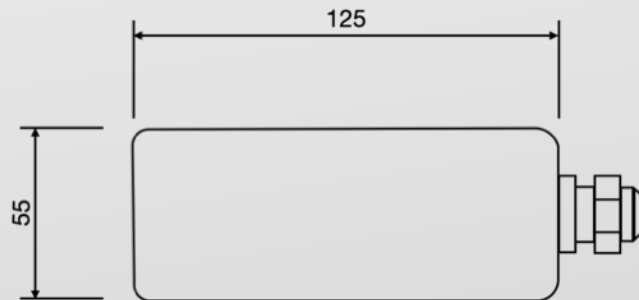

**LED LIGHT SOURCE - FIBRE OPTIC BUNDLE CONNECTION**

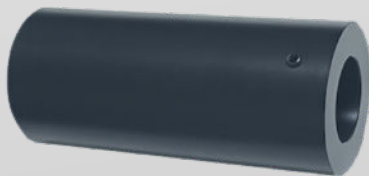

12W RGB+W LED LIGHT SOURCE



COMMON END FIBRE OPTIC BUNDLE



**INSERT THE COMMON END INTO THE LED LIGHT SOURCE AND LOCK  
THROUGH THE SCREW SET ON THE LIGHT SOURCE**