

**Product Features**

**Spotlight material:** 316L stainless steel and aluminum  
**Front ring:** 316L stainless steel  
**Front glass:** frosted  
**Led light:** white 2700°K - 3000°K - 4000°K - 5500°K  
**Power:** 1W  
**Supply current:** 350mA constant  
**Connection:** serial connection  
**Degree of protection:** IP65  
**Installation:** by means of (included) housing frame  
**Led lifetime:** 50.000 hours  
**Control mode:** on/Off, Dimmable, RF Remote Control, DMX, DALI, Smart App\*




**Finish**

**AO** Matt stainless steel

**LED color**


- 001** White 2700K
- 20** Blue
- 00** White 3000K
- 30** Green
- 01** White 4000K
- 40** Red
- 10** White 5500K

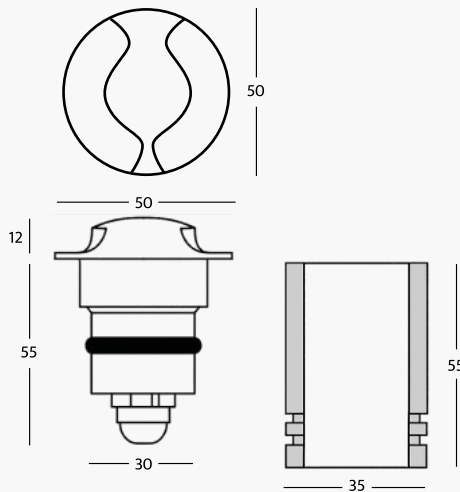

**Focal**

**00** Diffuse light

**\* Smart Control & Support**



Walkable

Floor (external)

Steps lighting

Wall (internal)

2 sides lighting