
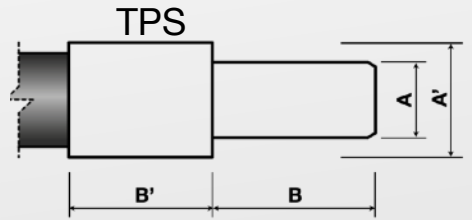


COMPOSIZIONE FASCI E TERMINALI

Le fibre ottiche sintetiche PMMA, note anche come Polimetilmetacrilato, sono disponibili come fibre singole rivestite con diametri compresi tra 0,75 e 3 mm, nello specifico 0,75 - 1 - 1,5 - 2 - 3 mm. Per ottenere diametri maggiori, le fibre ottiche vengono assemblate in fasci più sottili, con diametri di 0,75 mm o 1 mm. Tali fibre sono ricoperte con guaine protettive in PVC o polietilene autoestinguente.

BUNDLES AND FERRULES SPECIFICATION

PMMA synthetic optical fibers, also known as Polymethylmethacrylate, are available as single coated fibers with diameters between 0.75 and 3 mm, specifically 0.75 - 1 - 1.5 - 2 - 3 mm. To obtain larger diameters, the optical fibers are assembled into thinner bundles, with diameters of 0.75 mm or 1 mm. These fibers are covered with protective sheaths in self-extinguishing PVC or polyethylene.

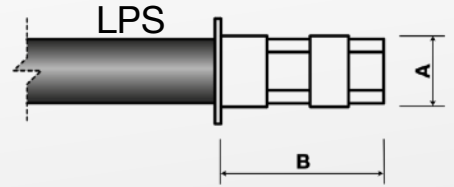

Codice fibra <i>Fibre code</i>	Ø ottico <i>Optic Ø</i>	Ø guaina <i>Sheath Ø</i>	Raggio curvatura minimo <i>Minimum bend radius</i>	Terminali . <i>Ferrules</i>		Dimensioni terminali . <i>Ferrules dimensions</i>			
				Codice . <i>Code</i>	Descrizione . <i>Description</i>	A	B	A'	B'
PR10	1,0mm	2,2mm	10mm	LPS/10	Rivetto con lucidatura piana <i>Flat polished rivet</i>	3,0mm	13mm	-	-
PR15	1,5mm	2,7mm	15mm	LPS/15	Rivetto con lucidatura piana <i>Flat polished rivet</i>	3,5mm	13mm	-	-
PR20	2,0mm	2,7mm	20mm	LPS/20	Rivetto con lucidatura piana <i>Flat polished rivet</i>	3,5mm	13mm	-	-
PR33	3,3mm	4,8mm	30mm	LPS/33	Rivetto con lucidatura piana <i>Flat polished rivet</i>	5,5mm	13mm	-	-
PR45	4,5mm	7,0mm	45mm	TPS/45	Terminale tornito in ottone con lucidatura piana <i>Flat polished brass ferrule</i>	7,9mm	17mm	12mm	15mm
PR60	6,0mm	8,5mm	60mm	TPS/60	Terminale tornito in ottone con lucidatura piana <i>Flat polished brass ferrule</i>	7,9mm	17mm	12mm	15mm
PR80	8,0mm	10,7mm	90mm	TPS/80	Terminale tornito in ottone con lucidatura piana <i>Flat polished brass ferrule</i>	10mm	17mm	14mm	15mm