



QR/RGB+W

Sistema di alimentazione e controllo per STRIP LED RGB+W con telecomando a radiofrequenza
Power supply and control system for RGB+W spotlights by touch panel RF

Controllo con telecomando RF per strip RGB Control with RF remote control for RGB strips

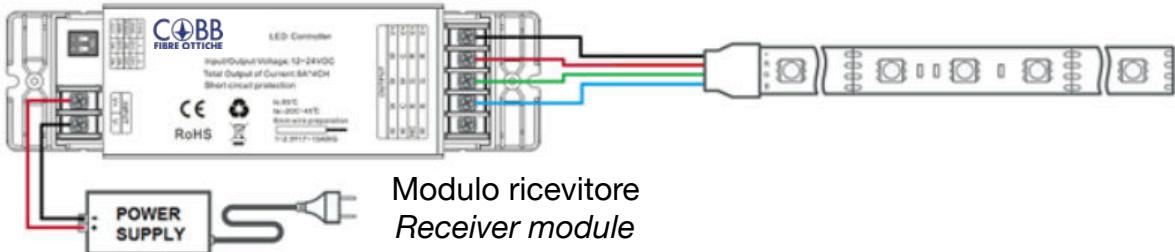

Controllo con telecomando RF per strip RGB+W Control with RF remote control for RGB+w strips

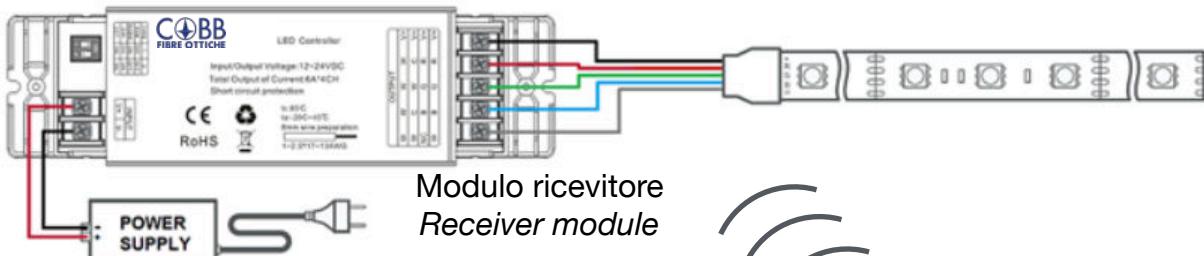

Progettato come controller per strip a LED a tensione costante RGB / RGB+W.

Designed as RGB / RGB+W constant voltage LED strip controller.

DC12-24V uscita a quattro canali, max. corrente di carico: 4CH * 6A; Max. potenza di carico: 288 W / 12V; 576W / 24V.

DC12-24V four channel output, max. load current: 4CH * 6A; Max. Load power: 288W / 12V; 576W / 24V.

Controllo della sincronizzazione wireless sia in modalità statica che dinamica con un solo telecomando, anche di più moduli.

Wireless synchronization control both in static and dynamic mode with a single remote control, even for multiple modules.

Funzione di memoria, ogni volta che l'accensione si riserva la modalità che si interrompe nell'ultimo spegnimento.

Memory function, every time the ignition reserves the mode that stops in the last shutdown.

Effetto di controllo perfetto, inclusi 1024 colori statici (RGB / RGB+W) e funzione soft dim.

Perfect control effect, including 1024 static colors (RGB / RGB+W) and soft dim function.



QR/RGB+W

Sistema di alimentazione e controllo per STRIP LED RGB+W con telecomando a radiofrequenza
Power supply and control system for RGB+W spotlights by touch panel RF

SQR/RGB 40

CE IP40

Modulo ricevitore SQR/RGB40 / Receiver module SQR/RGB40


Ingresso . Input voltage

12-48VDC

Nr max Led collegabili per singolo modulo SQR/RGB40

6

Maximum Nr Leds connectable to SQR/RGB40



SQR/RGB 21

CE IP40

Telecomando a RF / RF remote control


FUNZIONI / FUNCTIONS

TELECOMANDO A RF

- ON/OFF pulsanti "O" e "I" (A)
- Selezione singolo colore tramite "anello touch" (B)
- Selezione programmi "Mode" (C)
- ON/OFF "W" luce bianca e regolazione intensità di luce "-" e "+" (D)
- Regolazione intensità di luce di tutti i colori ""B-"" e "B+" (E)
- Regolazione velocità rotazione programmi "S-" e "S**" (F)
- Regolazione frequenze radio telecomando per controllo differenti aree (G)

RF REMOTE CONTROL

- ON / OFF buttons "O" and "I" (A)
- Single color selection via "touch ring" (B)
- "Mode" program selection (C)
- ON / OFF "W" white light and light intensity adjustment "-" and "+" (D)
- Light intensity adjustment of all colors "" B- " and " B + " (E)
- Program rotation speed adjustment "S-" and "S **" (F)
- Remote control radio frequency adjustment to control different areas (G)

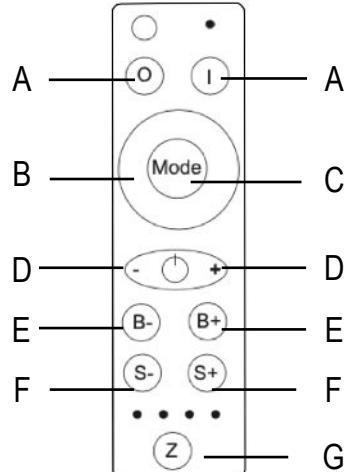

TRDC/24/...

CE IP40

Alimentatore 24V / 24V Power Supply

Ingresso . Input voltage

100-240VAC

- Alimentatore modulo ricevitore SQR/RGB40 / Power supply for receiver module SQR/RGB40

