

**"RF-LRGB+WLED12": 12W RGB+W LED LIGHT SOURCE AND REMOTE CONTROL**

The Led light sources LRGB-LED Series are produced to be used with glass and pmma optical fibres. These light sources allow you to control the emitted light and color rotation speed, creating spectacular effects through radio frequency control. The light sources are supplied with an electronic device for connection to an unlimited number of led light sources which maintaining the color sync.

**TECHNICAL FEATURES**

- 12W RGB+W LED high power (red, green, blue + white)
- Power 12W
- Fanless cooling
- IP54 protection (IP65 on request)
- Led lifespan 50.000 hours
- Supply voltage: 230V-50/60Hz



**RGB+W COLOR REMOTE CONTROL**



**RF REMOTE CONTROL FUNCTIONS**

- ON/OFF :**
  - on or off for any function
- PROGRAMS :**
  - 8 programs
- SPEED / BRIGHTNESS + :**
  - the speed / brightness will increase speed or brightness when you touch the key each time
- SPEED / BRIGHTNESS - :**
  - the speed / brightness will decrease speed or brightness when you touch the key each time
- COLOR RING :**
  - touch and choose any color which you want
- WHITE COLOR BUTTON**
  - button to turn on the white color led
- ZONE CONTROL BUTTON**
  - button to control different zones with one rf remote control or to change frequency of each single rf remote control

**"RF-LRGB+W/LED12" SYSTEM'S COMPONENTS**

12W RGB+W LED LIGHT SOURCE




R.F. RECEIVER MODULE



R.F. REMOTE CONTROL



**DIMENSIONS**

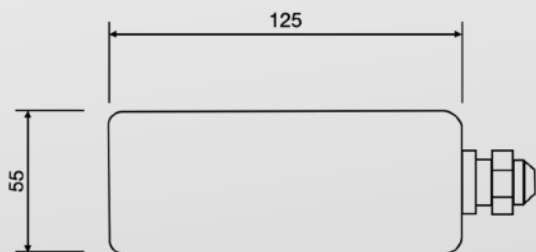

**WALL SUPPORT**



**LED LIGHT SOURCE - FIBRE OPTIC BUNDLE CONNECTION**



12W RGB+W LED LIGHT SOURCE



COMMON END

FIBRE OPTIC BUNDLE



INSERT THE COMMON END IN THE LIGHT SOURCE AND BLOCK IT THROUGH THE SCREW SET ON THE LIGHT SOURCE