


# 3W LED white source

**COBB**  
FIBRE OTTICHE


“LWH-LED3+RF/SMART”

CE

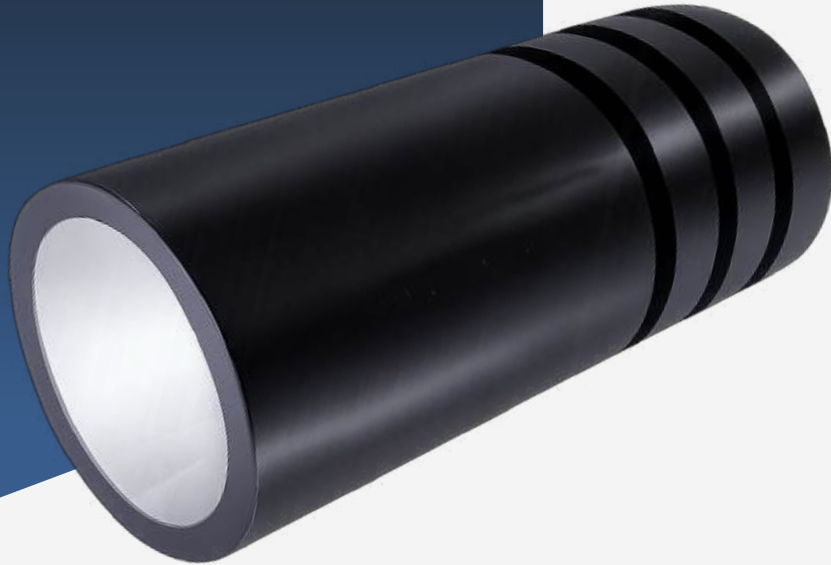

The led light sources in the "Led LWH" series are designed to be used with both glass optical fibers and synthetic optical fibers. The SMART version allows you to control the light color as follows:

- With the Tuya application, you can manage the lights from a smartphone or tablet, adjust the intensity, color, and programming.
- The "Intelligent Assistant Control" is compatible with Alexa and Google Assistant for voice control of the lights.
- It also includes a radio frequency touch remote for traditional control.
- It provides customized, practical, and efficient lighting for your home, office, wellness center, etc.
- It allows you to conveniently and intuitively control the lights with various control options.

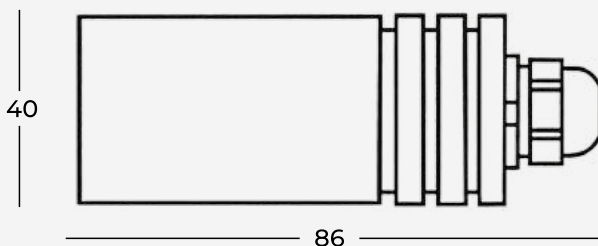

Dimensions

COBB FIBRE OTTICHE SRL

Via Nelson Mandela, 20 | 24048 Treviolo (BG) | Italy Tel. +39 035 0448601 - Fax +39 035 0448585  
info@fibre-ottiche.com - www.fibre-ottiche.it

# System components

**COBB**  
FIBRE OTTICHE



## Remote control functions

**ON/OFF button:** power on and off the device

**SET button:** remote control pairing / setup

**Program selection (M button):** selection of available lighting programs

**Light intensity ring:** adjustment of light intensity by rotating the ring

**W button (night light):** activation of low-intensity night light

**Brightness + (B+):** increase brightness

**Brightness - (B-):** decrease brightness

**Program speed + (S+):** increase speed of lighting effects

**Program speed - (S-):** decrease speed of lighting effects

**Zone button:** control of different areas / zones via dedicated selection

COBB FIBRE OTTICHE SRL

Via Nelson Mandela, 20 | 24048 Treviolo (BG) | Italy Tel. +39 035 0448601 - Fax +39 035 0448585  
info@fibre-ottiche.com - www.fibre-ottiche.it




Technical specifications	Description
Led color	white
Power	3W
Cooling	fanless cooling
Lifetime	50.000 hours
Standard connector input	30 mm
Protection rating (IP)	IP54 (IP65 on request)
Housing	delrin (POM)
Finish	black
Dimmable	yes
Power supply	110-240VAC/50-60Hz (on request: 12-24VDC)

3W LED light source



fibre optics bundle

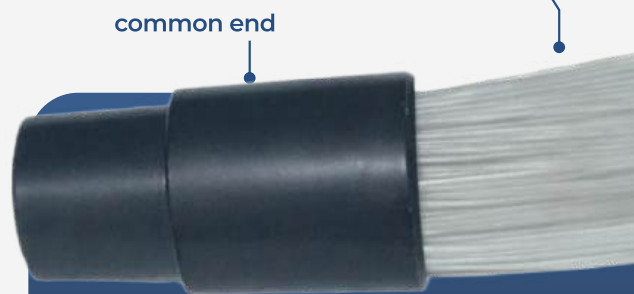

common end

insert the common end in the light source and block it through the screw set on the light source

