



QR/RGB+W

Power supply and control system for RGB+W spotlights by touch panel RF

Control with RF remote control for RGB strips

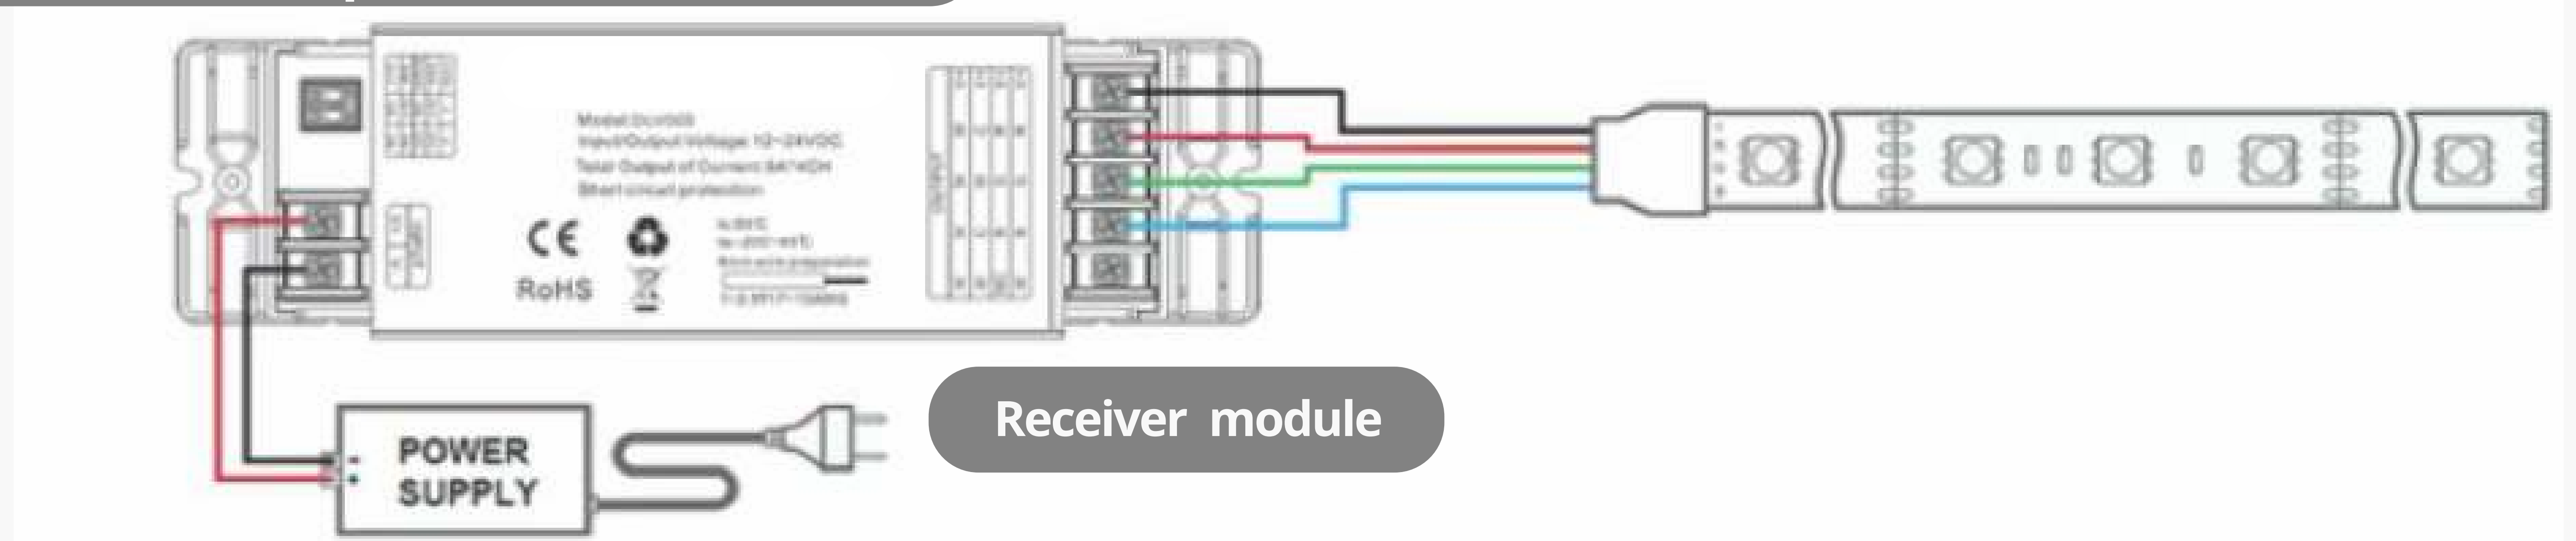

Control with RF remote control for RGB+W strips

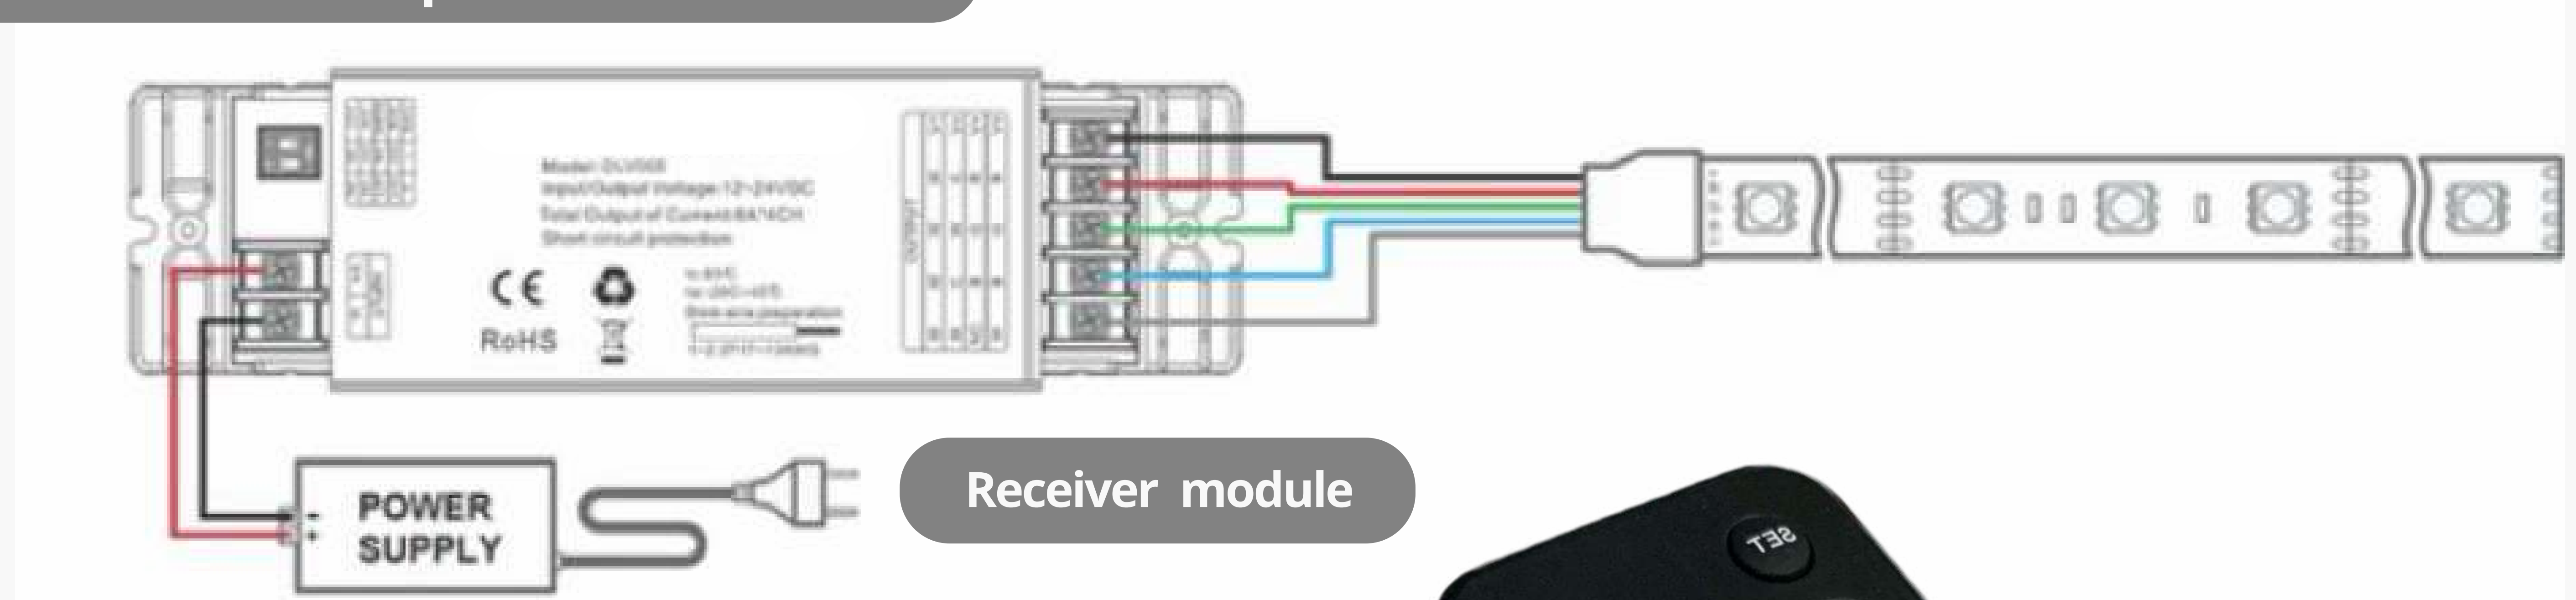

Designed as RGB / RGB+W constant voltage LED strip controller.

DC12-24V four channel output, max. load current: 4CH * 6A; Max. Load power: 288W / 12V; 576W / 24V.

Wireless synchronization control both in static and dynamic mode with a single remote control, even for multiple modules.

Memory function, every time the ignition reserves the mode that stops in the last shutdown.

Perfect control effect, including 1024 static colors (RGB / RGB+W) and soft dim function.



Rf remote control



COBB FIBRE OTTICHE SRL

Via Nelson Mandela, 20 | 24048 Treviolo (BG) | Italy Tel. +39 035 0448601 - Fax +39 035 0448585
info@fibre-ottiche.com - www.fibre-ottiche.it

QR/RGB+W

Power supply and control system for RGB+W spotlights by touch panel RF

SQR/RGB 40

Receiver module
SQR/RGB40
12-48VDC


CE IP40



Receiver module SQR/RGB40

Input voltage 12-48VDC

Maximum Nr 6 Leds connectable to
SQR/RGB40

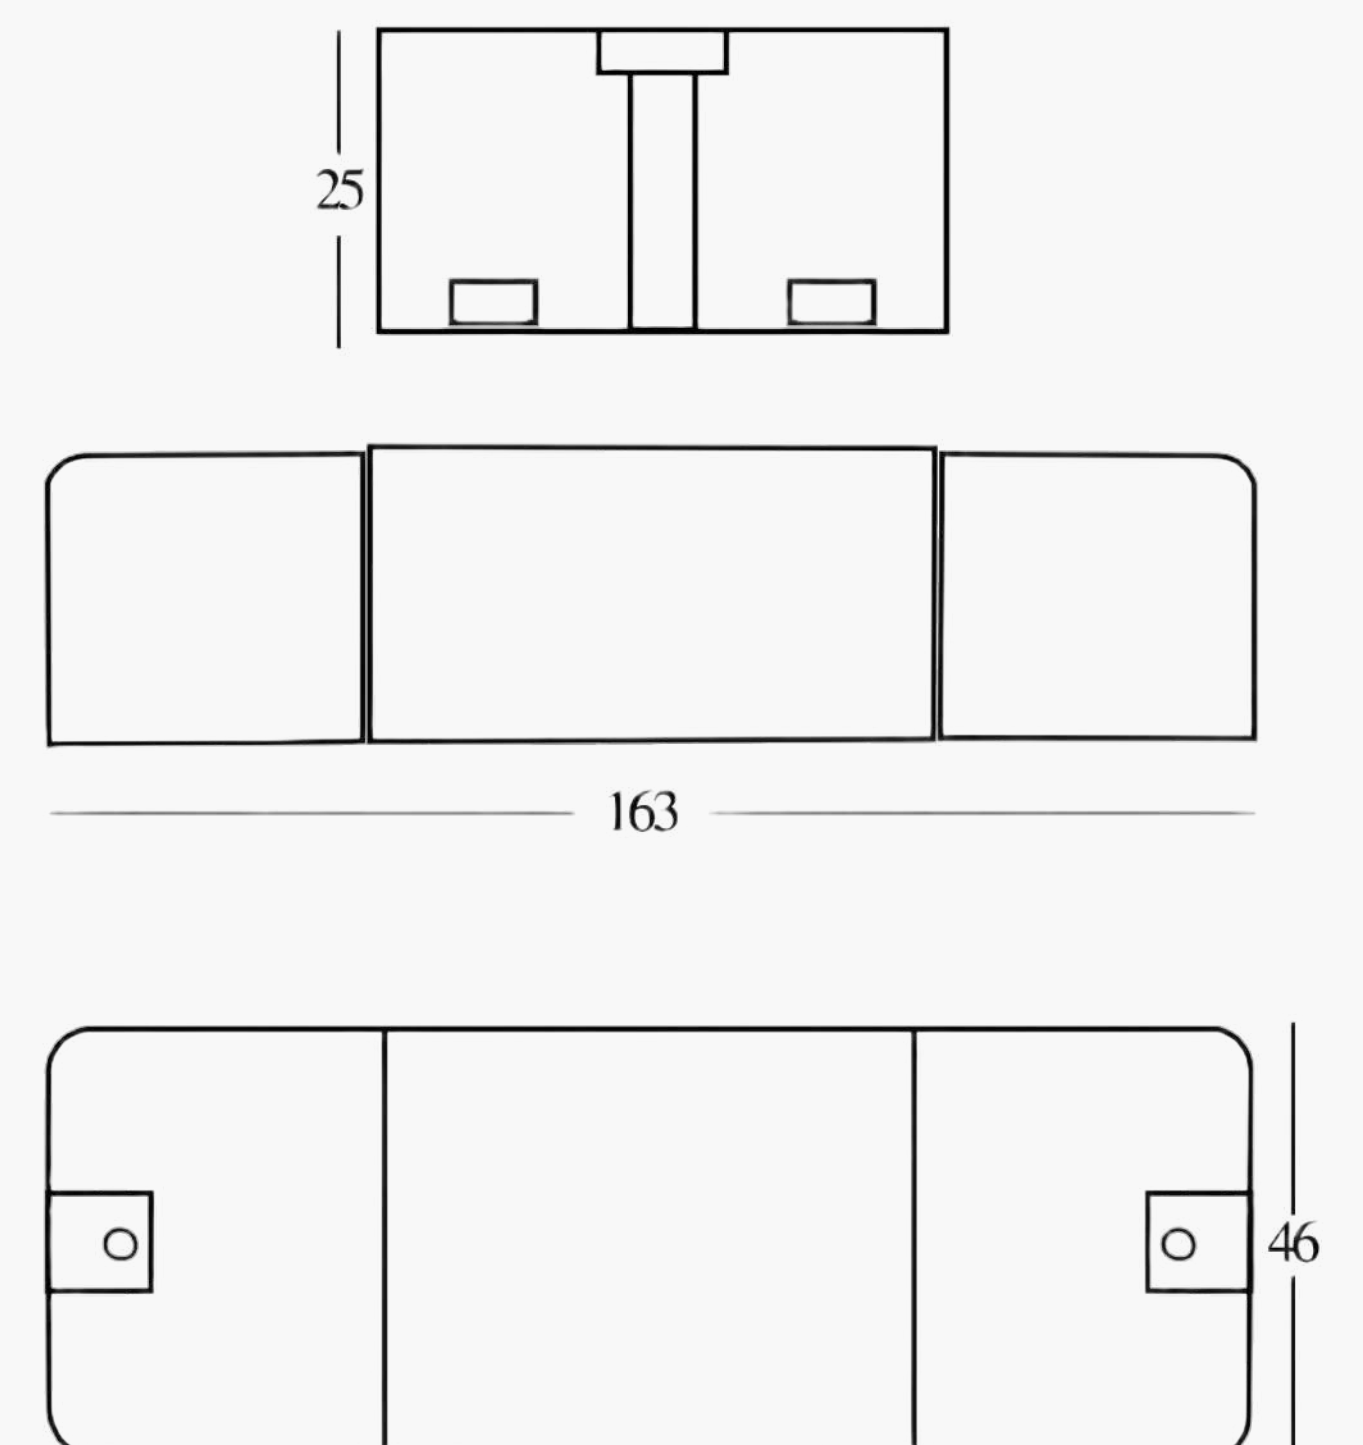

SQR/RGB 21


RF remote control

CE IP40



RF remote control

- ON / OFF buttons "O" and "I" (A)
- Single color selection via "touch ring" (B)
- "Mode" program selection (C)
- ON / OFF "W" white light and light intensity adjustment "-" and "+" (D)
- Light intensity adjustment of all colors "" B- "and" B + "(E)
- Program rotation speed adjustment "S-" and "S *" (F)
- Remote control radio frequency adjustment to control different areas (G)

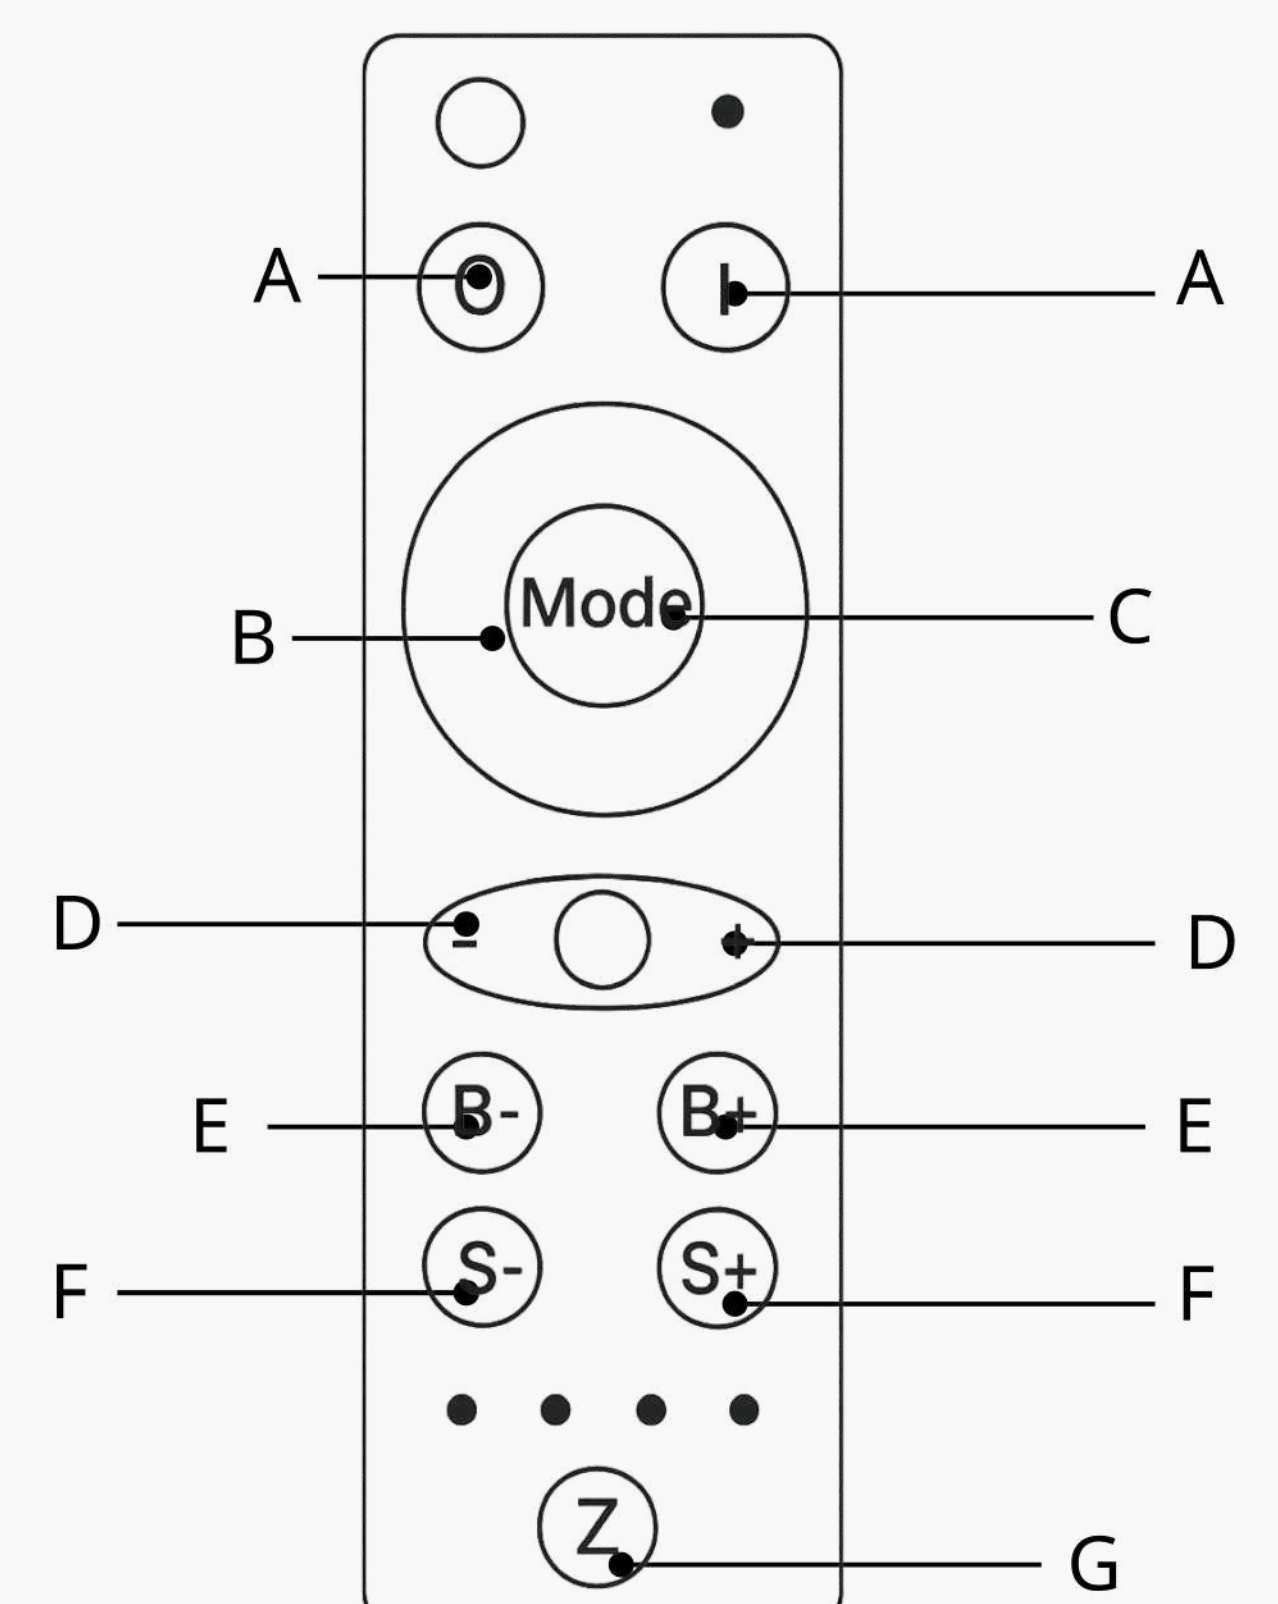

TRDC/24/...

24V Power
Supply
100-240VAC


CE IP40



24V Power Supply

Input voltage 100-240VAC

Power supply for receiver module
SQR/RGB40

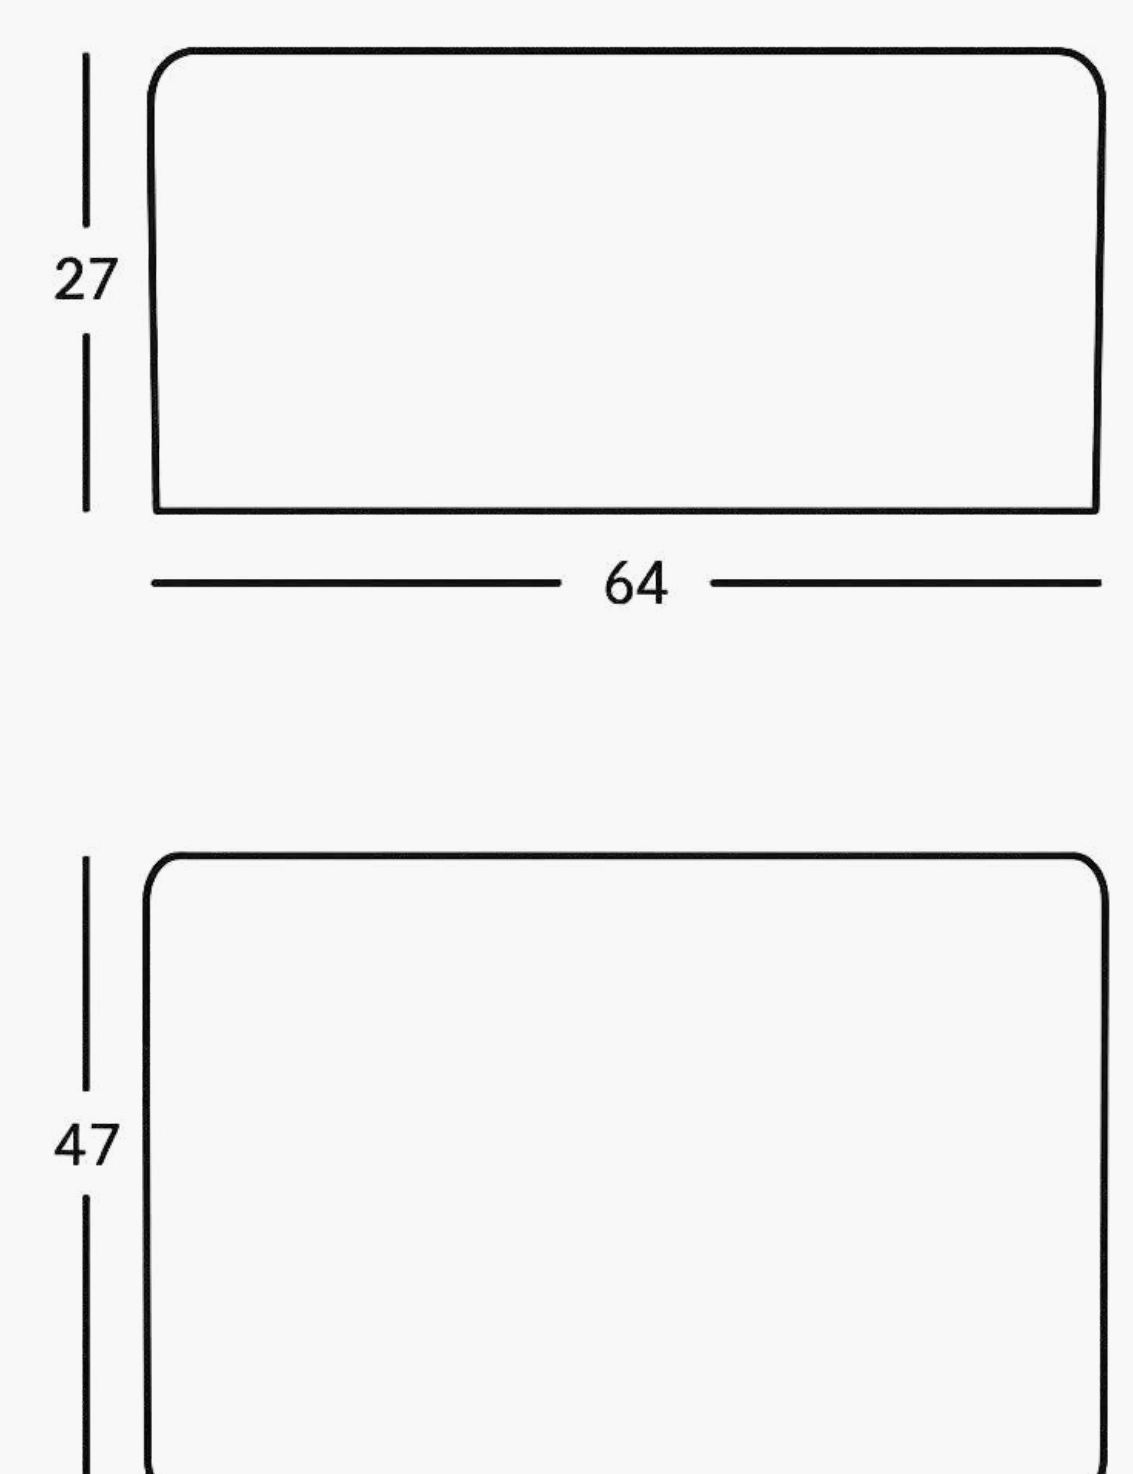

COBB FIBRE OTTICHE SRL

Via Nelson Mandela, 20 | 24048 Treviolo (BG) | Italy Tel. +39 035 0448601 - Fax +39 035 0448585
info@fibre-ottiche.com - www.fibre-ottiche.it